


Attention:  
 Toe rail to be continuous. Any gaps for cleats, etc. not to be wider than 100mm measured from end of toe rail to cleat, etc.  
 Deck hatches are to be fitted with anti-slip patches. This can be a longitudinal strip of 50mm width.  
 The distribution of the anti-slip surfaces shall be arranged with respect to the certifying body's requirements.

Attention:  
 Foundations for all deckfittings to be inserted in deckmould  
 All positions of deckfittings and function of line systems are to be checked on board by mock-up  
 All angles of foundations to be taken on board  
 Sheet angels for winches according to manufacturers requirements  
 All winches optional electric driven  
 Dimensions of fittings to be taken from manufacturers specification - NOT from this drawing  
 Cup holders and fixing points for life lines to be provided. Exact dimensions and positions to be given from Yachtzentrum

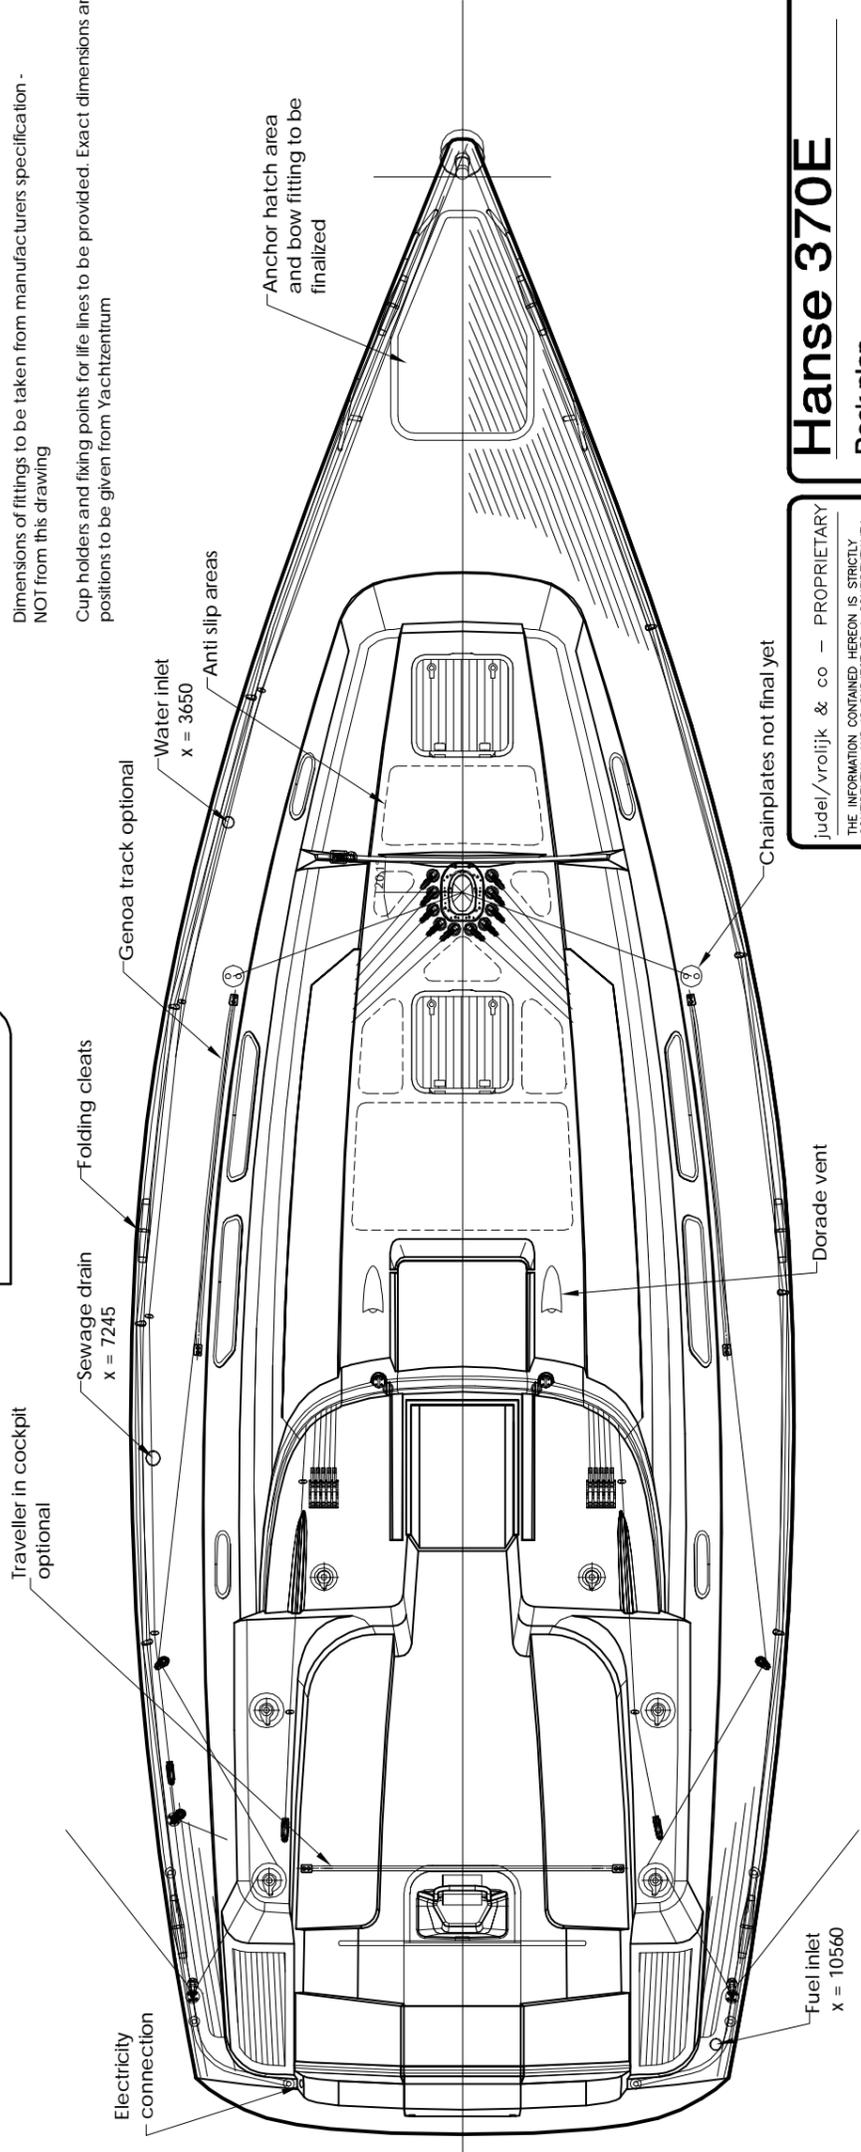

Preliminary - Drawing in progress!

ISSUE	MODIFICATION	DATE	DRAWN BY	APPROVED
5	Geometry finalized	28-06-05	ps	
4	Details added	31-05-05	ps	
3	modified deck geometry (ts#46)	27-05-05	ps	

Judel/vrolijk & co - PROPRIETARY  
 THE INFORMATION CONTAINED HEREIN IS STRICTLY CONFIDENTIAL AND IS TO BE USED ONLY IN ACCORDANCE WITH THE TERMS OF THE AGREEMENT AND A PERSON USING OR DISCLOSING THE INFORMATION CONTAINED HEREIN IN BREACH OF SUCH AGREEMENT SHALL BE SUBJECT TO AN ACTION TO ENJOIN SUCH USE AND A SUIT FOR DAMAGES.  
 DUE TO BUILDING TOLERANCES ALL DIMENSIONS GIVEN SHALL BE CHECKED ON THE BOAT!  
 ALL DIMENSIONS IN MM.

**Hanse 370E**  
**Deck plan**  
 1 : 40 SCALE  
 1 OF 1 SHEET  
 HA37-LB DRAWING NUMBER  
**Judel/vrolijk & co - engineering gmbh**  
 AM SEEDEICH 45  
 D-27572 BREMERHAVEN  
 TELEFON +49(0)471 97 123 95  
 TELEFAX +49(0)471 97 123 96  
 E-mail: info@judel-vrolijk.com